

Features

- Ultra High Efficiency (Up to 96.0%)
- Full Power at Wide Output Current Range (Constant Power)
- Thermal Sensing and Protection for LED Module
- 0-10V/PWM/Timer Dimmable (3 Timer Modes, Isolated design)
- Dim-to-Off with Standby Power $\leq 2.5W$
- Output Lumen Compensation
- Input Surge Protection: 6kV line-line, 10kV line-earth
- All-Around Protection: OVP, SCP, OTP
- Waterproof (IP67)
- Suitable for Independent Use
- 5 Years Warranty



Description



The EFD-1K2SxxxDV series is a 1200W, constant-current, programmable LED driver that operates from 180-528Vac input with excellent power factor. Created for many lighting applications including high mast, sports, horticulture and aquaculture, it provides a dim-to-off mode with low standby power. The high efficiency of these drivers and compact metal case enables them to run cooler, significantly improving reliability and extending product life. To ensure trouble-free operation, protection is provided against input surge, under voltage lock out, input over voltage, output over voltage, short circuit, and over temperature.

Models

Adjustable Output Current Range	Full-Power Current Range(1)	Default Output Current	Input Voltage Range(2)	Output Voltage Range	Max. Output Power	Typical Efficiency (3)	Power Factor		Model Number
							277Vac	480Vac	
0.336-4.2A	3.36-4.20A	4.2A	180~528Vac/ 255~500Vdc	143~357Vdc	1200W	96.0%	0.96	0.95	EFD-1K2S420DV
0.448-5.60A	4.48~5.60A	5.6A	180~528Vac/ 255~500Vdc	108~268Vdc	1200W	95.5%	0.96	0.95	EFD-1K2S560DV
0.592-7.40A	5.92~7.4A	7.0 A	180~528Vac/ 255~500Vdc	81~202Vdc	1200W	95.0%	0.96	0.95	EFD-1K2S740DV

- Notes:** (1) Output current range with constant power at 1200W
 (2) Certified voltage range: 200-480Vac or 255-500Vdc
 (3) Measured at 100%load and 480Vac input (see below "General Specifications" for details).

I-V Operating Area

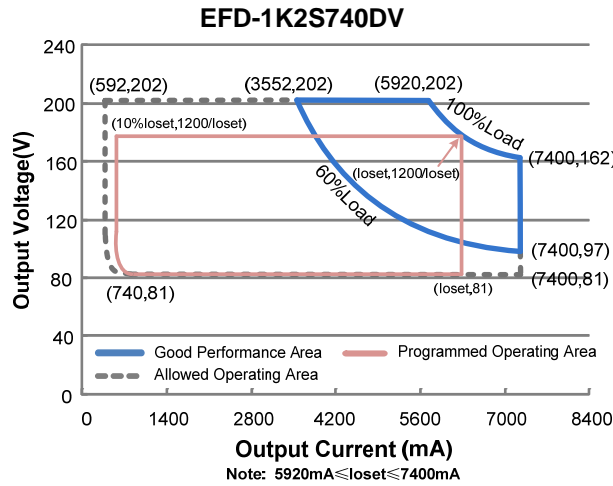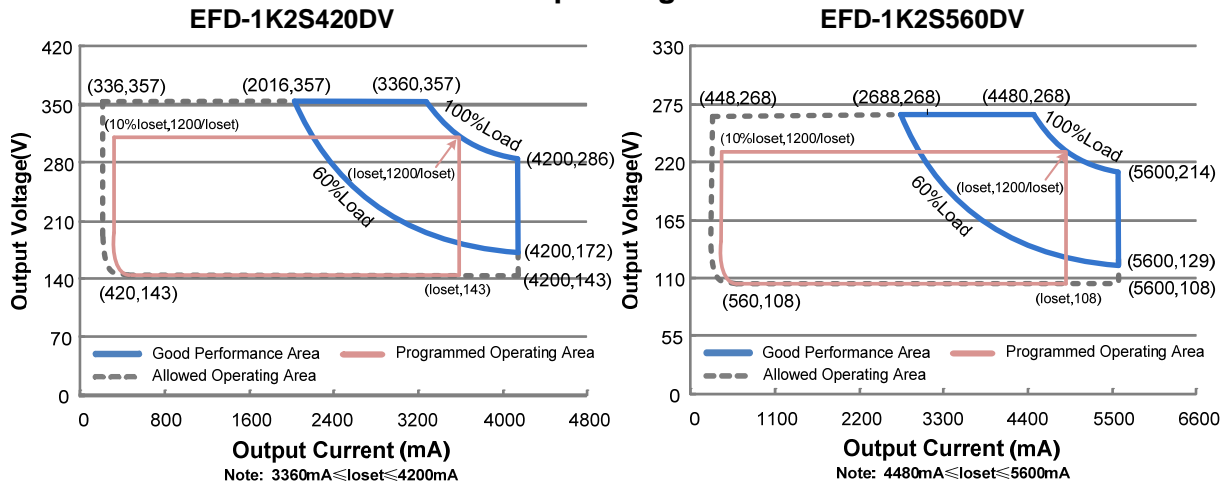

Input Specifications

Parameter	Min.	Typ.	Max.	Notes
Input Voltage	180 Vac	-	528 Vac	255-500Vdc
Input Frequency	47 Hz	-	63 Hz	
Leakage Current			0.70 mA	IEC60598-1; 480Vac/ 60Hz , grounding effectively
Input AC Current			5.5 A	Measured at 100%load and 240Vac input.
	-	-	4.7 A	Measured at 100%load and 277Vac input.
	-	-	2.7 A	Measured at 100%load and 480Vac input.
Inrush Current(I ² t)	-	-	37.5 A ² s	At 480Vac input, 25°C cold start, duration=1.18ms, 10%I _{pk} -10%I _{pk} . See Inrush Current Waveform for the details.
PF	0.90	-	-	At 200-480Vac, 50-60Hz, 60%-100% Load (720 – 1200W)
THD	-	-	20%	

Output Specifications

Parameter	Min.	Typ.	Max.	Notes
Output Current Tolerance	-5%loset	-	5%loset	100% load
Output Current Setting(loset) Range				
EFD-1K2S420DV	336 mA	-	4200 mA	
EFD-1K2S560DV	448 mA	-	5600 mA	
EFD-1K2S740DV	592 mA	-	7400 mA	
Output Current Setting Range with Constant Power				
EFD-1K2S420DV	3360 mA	-	4200 mA	
EFD-1K2S560DV	4480 mA	-	5600 mA	
EFD-1K2S740DV	5920 mA	-	7400 mA	
Total Output Current Ripple (pk-pk)	-	5%lomax	10%lomax	100%load , 20 MHz BW
Output Current Ripple at < 200 Hz (pk-pk)	-	2%lomax	-	100%load
Startup Overshoot Current	-	-	10%lomax	100%load
No Load Output Voltage				
EFD-1K2S420DV	-	-	390 V	
EFD-1K2S560DV	-	-	300 V	
EFD-1K2S740DV	-	-	230 V	
Line Regulation	-	-	±0.5%	100%load
Load Regulation	-	-	±1.5%	
Turn-on Delay Time	-	-	0.75 s	Measured at 200-480Vac input, 60%-100% Load
Temperature Coefficient of loset	-	0.03%/°C	-	Case temperature = 0°C ~Tc max
12V Auxiliary Output Voltage	10.8 V	12 V	13.2 V	
12V Auxiliary Output Source Current	0 mA	-	200 mA	Return terminal is "Dim"

Note: All specifications are typical at 25°C unless otherwise stated.

General Specifications

Parameter	Min.	Typ.	Max.	Notes
Efficiency at 240 Vac input:				
EFD-1K2S420DV				
lo= 3360 mA	91.5%	93.5%	-	Measured at 100% load and steady-state temperature in 25°C ambient; (Efficiency will be about 2.0% lower if measured immediately after startup.)
lo= 4200 mA	91.5%	93.5%	-	
EFD-1K2S560DV				
lo= 4480 mA	91.5%	93.5%	-	
lo= 5600 mA	91.0%	93.0%	-	
EFD-1K2S740DV				
lo= 5920 mA	91.0%	93.0%	-	
lo= 7400 mA	91.0%	93.0%	-	

General Specifications (Continued)

Parameter	Min.	Typ.	Max.	Notes
Efficiency at 277 Vac input: EFD-1K2S420DV I _o = 3360 mA I _o = 4200 mA EFD-1K2S560DV I _o = 4480 mA I _o = 5600 mA EFD-1K2S740DV I _o = 5920 mA I _o = 7400 mA	92.5% 92.0%	94.5% 94.0%	- -	Measured at 100% load and steady-state temperature in 25°C ambient; (Efficiency will be about 2.0% lower if measured immediately after startup.)
Efficiency at 347 Vac input: EFD-1K2S420DV I _o = 3360 mA I _o = 4200 mA EFD-1K2S560DV I _o = 4480 mA I _o = 5600 mA EFD-1K2S740DV I _o = 5920 mA I _o = 7400 mA	93.0% 93.0%	95.0% 95.0%	- -	
Efficiency at 480 Vac input: EFD-1K2S420DV I _o = 3360 mA I _o = 4200 mA EFD-1K2S560DV I _o = 4480 mA I _o = 5600 mA EFD-1K2S740DV I _o = 5920 mA I _o = 7400 mA	94.0% 93.0%	96.0% 95.0%	- -	
Standby power	-	-	2.5 W	Measured at 480Vac/50Hz; Dimming off
MTBF	-	212,000 Hours	-	Measured at 480Vac input, 80%load and 25°C ambient temperature (MIL-HDBK-217F)
Lifetime	-	100,000 Hours	-	Measured at 480Vac input, 80%load and 70°C case temperature; See lifetime vs. T _c curve for the details
Operating Case Temperature for Safety T _{c_s}	-40°C	-	+90°C	
Operating Case Temperature for Warranty T _{c_w}	-40°C	-	+75°C	Case temperature for 5 years warranty
Storage Temperature	-40°C	-	+85°C	Humidity: 5%RH to 100%RH
Dimensions Inches (L × W × H) Millimeters (L × W × H)	11.02 × 6.89 × 2.99 280 × 175 × 76			With mounting ear 11.02 × 9.06 × 2.99 280 × 230 × 76
Net Weight	-	6570 g	-	

Note: All specifications are typical at 25°C unless otherwise stated.

Dimming Specifications

Parameter		Min.	Typ.	Max.	Notes
Absolute Maximum Voltage on the Vdim (+) Pin		-20 V	-	20 V	
Source Current on Vdim (+)Pin		200 uA	300 uA	450 uA	Vdim(+) = 0 V
Dimming Output Range	EFD-1K2S420DV EFD-1K2S560DV EFD-1K2S740DV	10%loset	-	loset	3360mA ≤ loset ≤ 4200mA 4480mA ≤ loset ≤ 5600mA 5920mA ≤ loset ≤ 7400mA
	EFD-1K2S420DV EFD-1K2S560DV EFD-1K2S740DV	336 mA 448 mA 592 mA	-	loset	336mA ≤ loset < 3360mA 448mA ≤ loset < 4480mA 592mA ≤ loset < 5920mA
Recommended Dimming Input Range		0 V	-	10 V	Default 0-10V dimming mode.
Dim off Voltage		0.35 V	0.5 V	0.65 V	
Dim on Voltage		0.55 V	0.7 V	0.85 V	
Hysteresis		-	0.2 V	-	
PWM_in High Level		3 V	-	10 V	Dimming mode set to PWM in PC interface.
PWM_in Low Level		-0.3 V	-	0.6 V	
PWM_in Frequency Range		200 Hz	-	1KHz	
PWM_in Duty Cycle		1%	-	99%	
PWM Dimming off (Positive Logic)		3%	5%	8%	
PWM Dimming on (Positive Logic)		5%	7%	10%	
PWM Dimming off (Negative Logic)		92%	95%	97%	
PWM Dimming on (Negative Logic)		90%	93%	95%	
Hysteresis		-	2%	-	

Note: All specifications are typical at 25 °C unless stated otherwise.

Safety & EMC Compliance

Safety Category	Standard
CE	EN 61347-1, EN61347-2-13
CCC	GB 19510.1, GB 19510.14
EMI Standards	Notes
EN 55015 ⁽¹⁾	Conducted emission Test & Radiated emission Test
EN 61000-3-2	Harmonic current emissions
EN 61000-3-3	Voltage fluctuations & flicker
EMS Standards	Notes
EN 61000-4-2	Electrostatic Discharge (EFD): 8 kV air discharge, 4 kV contact discharge
EN 61000-4-3	Radio-Frequency Electromagnetic Field Susceptibility Test-RS


Safety & EMC Compliance (Continued)

EMS Standards	Notes
EN 61000-4-4	Electrical Fast Transient / Burst-EFT
EN 61000-4-5	Surge Immunity Test: AC Power Line: line to line 6 kV, line to earth 10 kV ⁽²⁾
EN 61000-4-6	Conducted Radio Frequency Disturbances Test-CS
EN 61000-4-8	Power Frequency Magnetic Field Test
EN 61000-4-11	Voltage Dips
EN 61547	Electromagnetic Immunity Requirements Applies To Lighting Equipment


Note: (1) This LED driver meets the EMI specifications above, but EMI performance of a luminaire that contains it depends also on the other devices connected to the driver and on the fixture itself.

(2) To perform electric strength (hi-pot) testing, the “GDT ground disconnect” (nut and metal lock sheet) on the driver end-cap should be removed temporarily to prevent the internal gas discharge tube from conducting (as allowed by IEC 60598-1 Clause 10.2). After testing is completed, these items must be reinstalled to restore line-to-earth surge protection and secure the end cap.


Derating

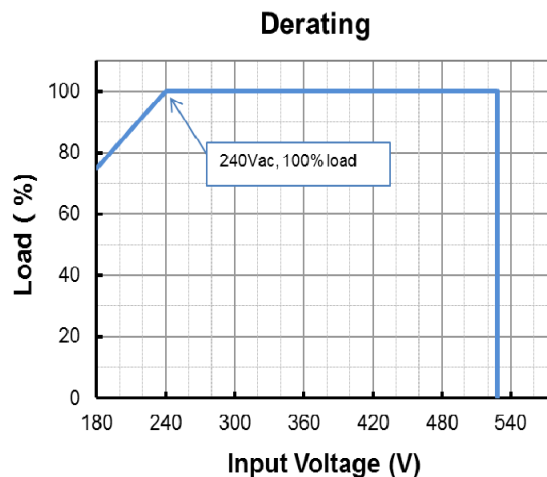

Lifetime vs. Case Temperature

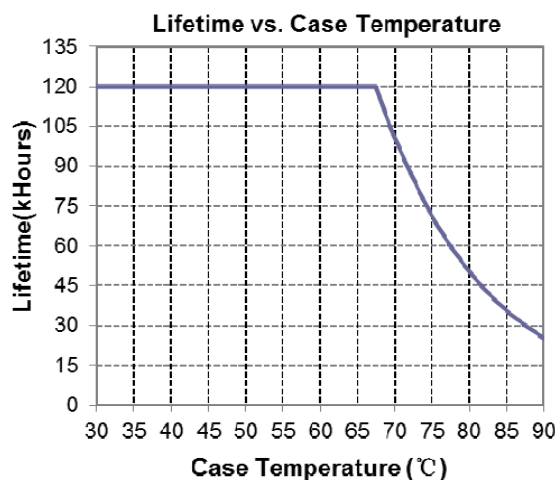


Inrush Current Waveform

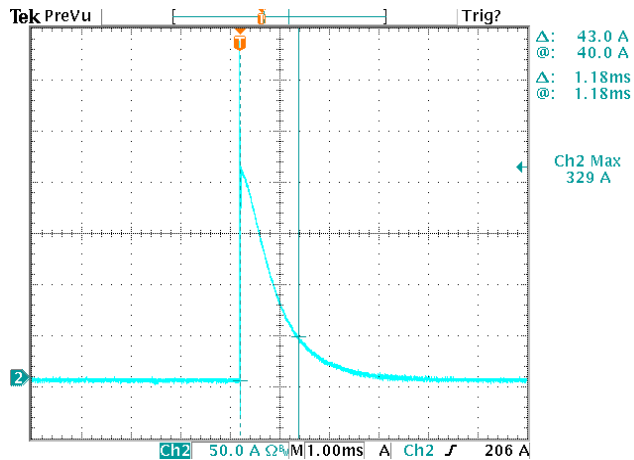


Efficiency vs. Load


EFD-1K2S420DV($I_o=3360mA$)
Efficiency vs. Output Voltage

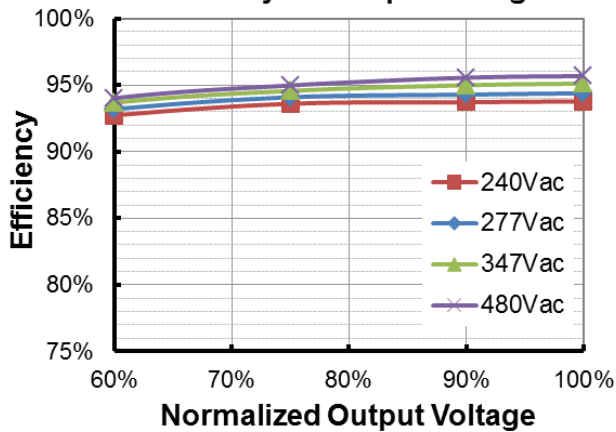


EFD-1K2S420DV($I_o=4200mA$)
Efficiency vs. Output Voltage


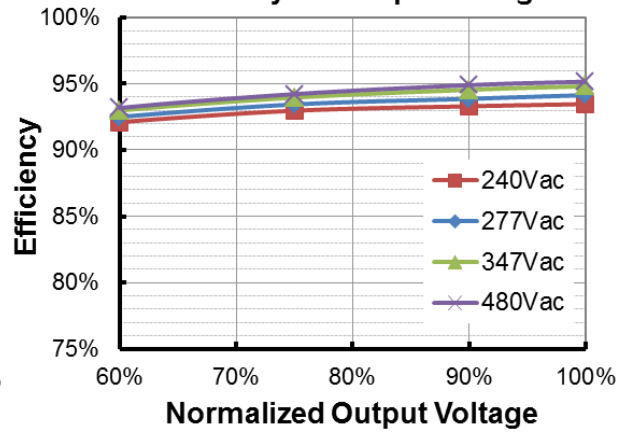


EFD-1K2S560DV($I_o=4480mA$)
Efficiency vs. Output Voltage

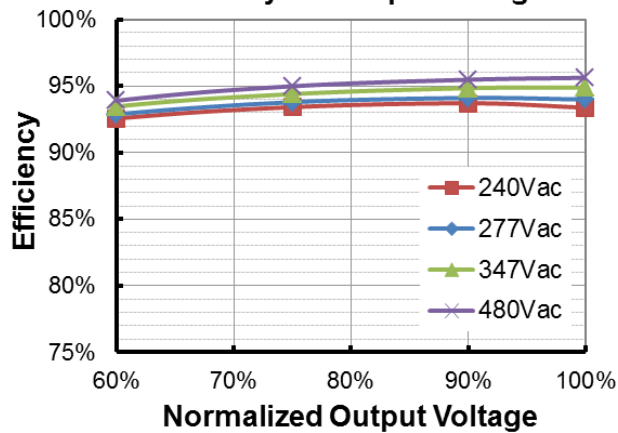


EFD-1K2S560DV($I_o=5600mA$)
Efficiency vs. Output Voltage

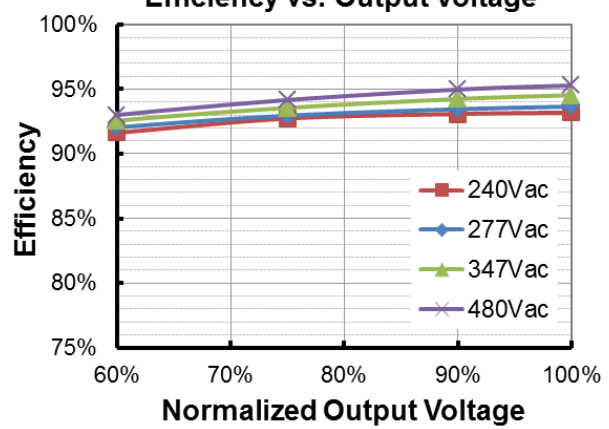


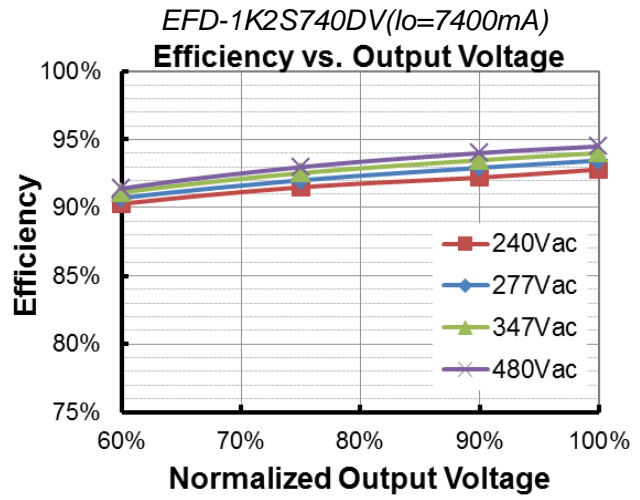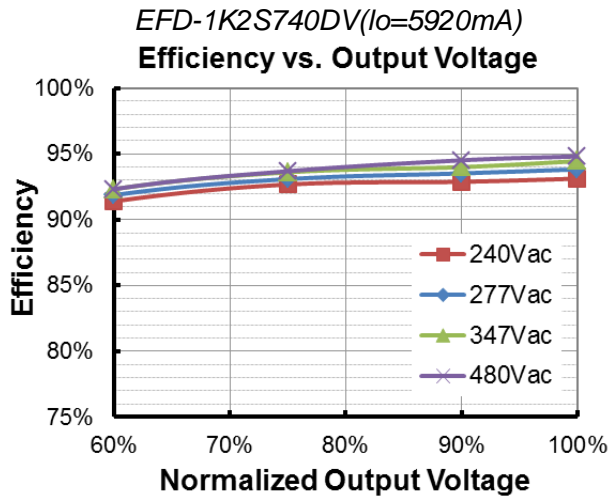

Power Factor

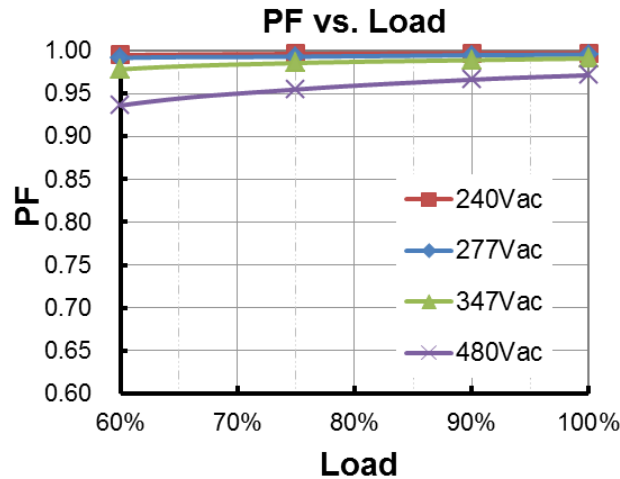

Total Harmonic Distortion

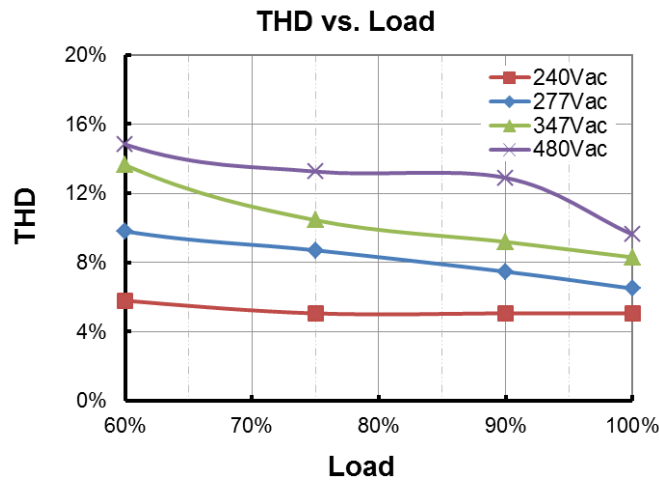


Protection Functions

Parameter		Min.	Typ.	Max.	Notes
External Thermal Protection NTC	R1	-	7.81 kOhm	-	When R_NTC falls below R1, External Thermal Protection is triggered, reducing output current until R2 is reached.
	R2	-	4.16 kOhm	-	When R_NTC is less than R2, output current is reduced to the programmed "Protection Current Floor."
	Protection Current Floor	10%loset	60%loset	100%loset	10%loset > lomin (default setting is 60%)
lomin		60%loset	100%loset	10%loset ≤ lomin (default setting is 60%)	
Over Temperature Protection		Decreases output current, returning to normal after over temperature is removed.			
Short Circuit Protection		Auto Recovery. No damage will occur when any output is short circuited. The output shall return to normal when the fault condition is removed.			
Over Voltage Protection		Limits output voltage at no load and in case the normal voltage limit fails.			

Dimming

● 0-10V Dimming

The recommended implementation of the dimming control is provided below.

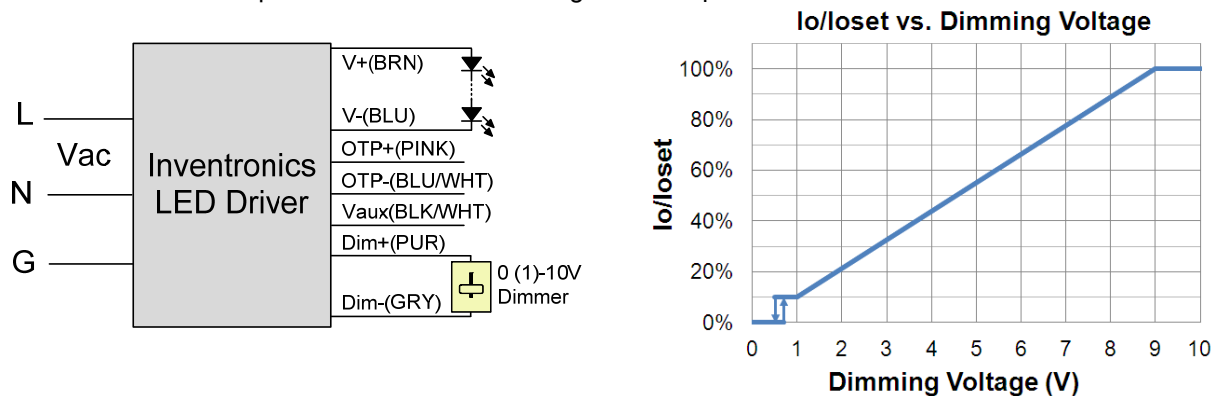


Implementation 1: DC Input

Notes:


1. The dimmer can also be replaced by an active 0-10V voltage source signal or passive components like resistors and zener.
2. Do NOT connect Dim- to the output V- or V+, otherwise the driver will not work properly.
3. If 0-10V dimming is not used, Dim + should be open.

● PWM Dimming

The recommended implementation of the dimming control is provided below.

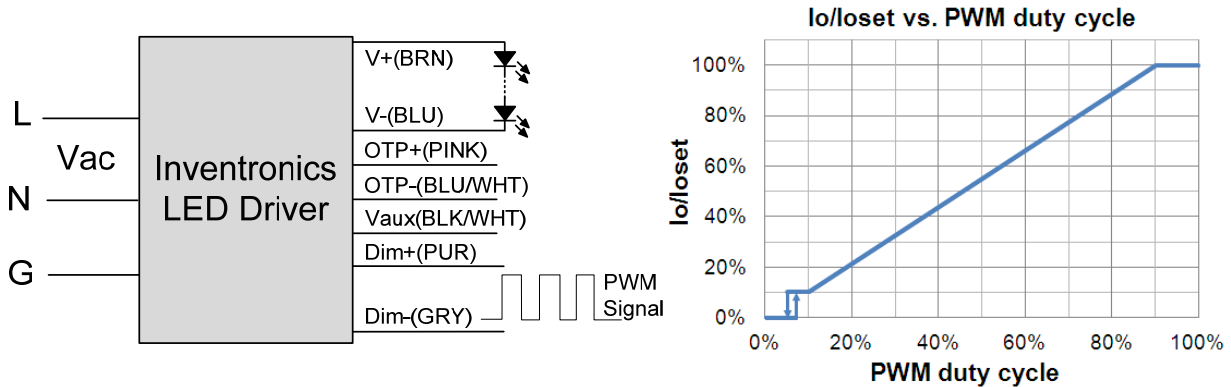

Implementation 2: Positive logic

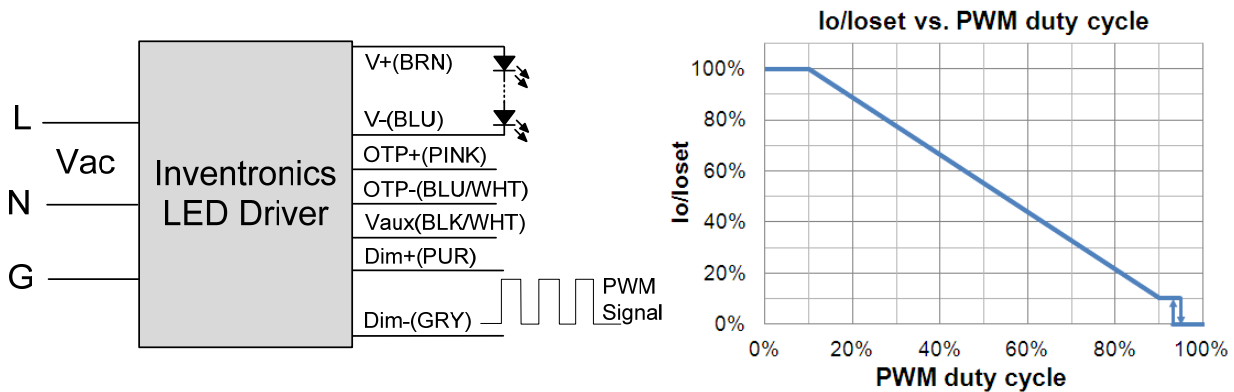

Implementation 3: Negative logic

● Time Dimming


Time dimming control includes 3 kinds of modes, they are Self Adapting-Midnight, Self Adapting-Percentage and Traditional Timer.

- **Self Adapting-Midnight:** Automatically adjusts the dimming curve based on the on-time of past two days (if difference <15 minutes), assuming that the center point of the dimming curve is midnight local time.
- **Self Adapting-Percentage:** Automatically adjusts the on-time of each step by a constant percentage = (actual on-time for the past 2 days if difference <15 min) / (programmed on-time from the dimming curve).
- **Traditional Timer:** Follows the programmed timing curve after power on with no changes.

● Output Lumen Compensation

Output Lumen Compensation (OLC) may be used to maintain constant light output over the life of the LEDs by driving them at a reduced current when new, then gradually increasing the drive current over time to counteract LED lumen degradation.


Programming Connection Diagram

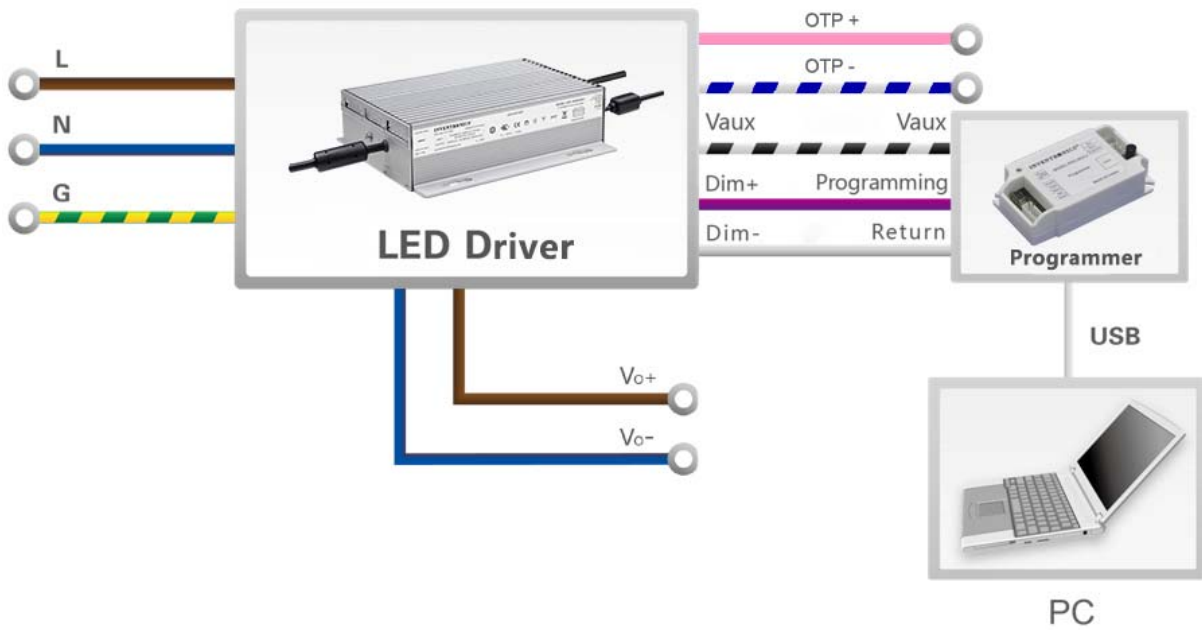

Note: The driver does not need to be powered on during the programming process.

- Please refer to [PRG-MUL2](#) (Programmer) datasheet for details.

Mechanical Outline

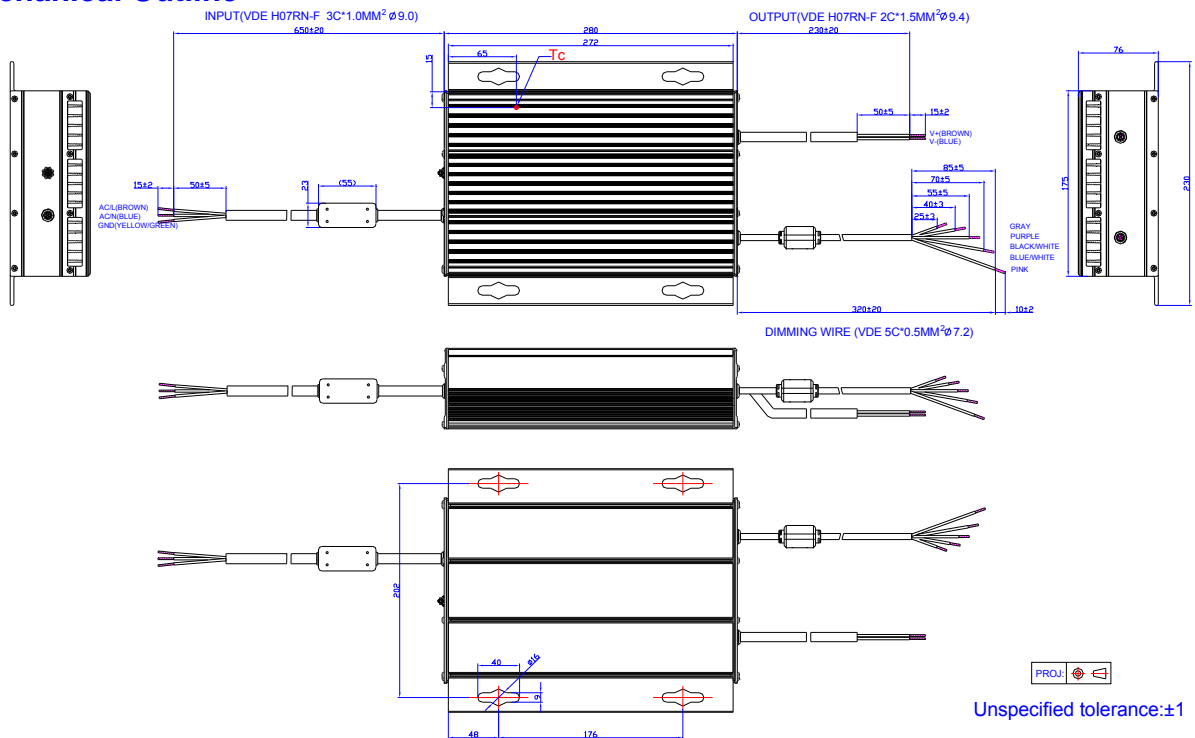

RoHS Compliance

Our products comply with the European Directive 2011/65/EC, calling for the elimination of lead and other hazardous substances from electronic products.

Revision History

Change Date	Rev.	Description of Change		
		Item	From	To
2018-03-12	A	Datasheet Release	/	/
2018-03-16	B	Programming Connection Diagram	/	Updated
2018-03-21	C	Features	Dim-to-Off with Standby Power \leq 2.4 W	Dim-to-Off with Standby Power \leq 2.5 W
		Standby power	2.4 W	2.5 W
2018-04-25	D	PSE	/	Updated
		Models	/	Updated